



## MX5600 Series Multiplexers

At the heart of most systems is a good, reliable multiplexer that delivers performance, flexibility and expandability. With video piracy a concern, there is also a need for a reliable scrambling system that is integrated with leading scrambling suppliers. As systems get more complex, a user-friendly method to configure, monitor and control the system is required.

The MX5600 series video, audio and data multiplexers are ideal for mission-critical applications. The powerful stream processing and Reflex™ statistical multiplexing makes them the flexible heart of any MPEG based broadcast system. The MX5600 range of multiplexers are suited for a wide range of multiplexing and re-multiplexing applications - including primary multiplexing in head-ends for DTH satellite, cable and terrestrial, contribution systems and re-multiplexing applications in cable and terrestrial regional head-ends. A wide range of options and integration with TANDBERG Television's nCompass Control makes the MX5600 the ideal choice for any MPEG based broadcast system.

### PRODUCT OVERVIEW

#### Efficient Transport Stream Construct

With the combination of Reflex™ statistical multiplexing, video bit-rate changing, opportunistic data and advanced multiplexing technology the MX5600 maximises the usage of available bit-rates.

#### Modular Architecture

The modular architecture combined with a wide range of available options, ensures that MX5600 range of multiplexers are ideal for any application that requires reliable and resilient performance and scalability as the system grows.

#### Full Integration with nCompass Control

The MX5600 range of multiplexers are fully integrated with TANDBERG Television's nCompass Control system to provide easy configuration, monitoring, backup and redundancy architecture.

### BASE UNIT FEATURES

#### M2/MUX/MX5620 and M2/MUX/MX5640

- MX5620 model – 2RU, 4 option slots
- MX5640 model – 4RU, 12 option slots
- 3 DVB ASI copper outputs
- Output rate up to 100 Mbps
- Highly efficient multiplexing algorithms
- Advanced re-multiplexing
- Reflex™ statistical multiplexing
- Control via TANDBERG nCompass Control
- SNMP remote monitoring

## HARDWARE OPTIONS

### DVB ASI Input Card (M2/MUX/4ASI-IN-1)

- Provides for input of transport streams for re-multiplexing
- Up to 100 Mbps MPTS and SPTS
- 4 inputs per card
- PSI/SI monitoring and processing

### DVB Simulcrypt Conditional Access (M2/MUX/DVBCA)

- Provides fully compliant internal DVB scrambling solution
- DVB Simulcrypt and OpenCAS interfaces

### BISS (M2/MUX/BISS)

- Up to 32 different BISS keys to be used within any single stream, thus allowing scrambling of different services with different keys

### Video Bit-rate Changing (M2/MUX/BRC)

- Allows the bit-rate of re-multiplexed video services to be groomed
- Separate datasheet available

### Opportunistic Data (M2/MUX/OPP-DATA)

- Allows IP encapsulated data to be inserted into spare output capacity
- SMPTE 325 flow control interfacing

### Ethernet Data Insertion (M2/MUX/EDI)

- Allows packetization and insertion of various data formats
- Support for both streamed and internally carouselled data

### DVB SFN Adaptation (M2/MUX/SFN)

- Provides internal framing and synchronization required for DVB SFN terrestrial networks
- Includes GPS receiver 1pps and 10 MHz interface option card

### DVB ASI Optical Interface (M2/MUX/ASI-OPT)

- Allows output of transport streams in DVB ASI optical format
- 2 outputs per option card

### DVB SPI Interface (M2/MUX/SPI-OUT)

- Allows output of transport streams on DVB SPI format
- 3 outputs per option card

### SMPTE 310 Interface (M2/MUX/SMPTE)

- Allows output of transport streams in DVB ASI optical format
- 2 outputs per option card

### GPS (M2/MUX/GPS)

- Allows synchronization to external GPS clock references
- Allows synchronization of other studio equipment deriving clock references from GPS receivers

### SPI-IN (M2/MUX/SPI-IN)

- Provides simple mechanism for interfacing transport streams
- Two channels for conversion of DVB SPI input signals to DVB ASI outputs

### Return Channel Satellite (M2/MUX/RCS)

- Carries the forward link signaling and interaction paths
- Play out of RCS SI tables


### Reed-Solomon FEC (M2/MUX/RSFEC)

- Implements spectral scrambling, Reed-Solomon encoding and interleaving
- Provides two DVB compliant ASI copper transport stream outputs

### Remote Boot (M2/MUX/REMBOT)

- Allows the multiplexer to be remotely booted

## SAMPLE CONFIGURATION

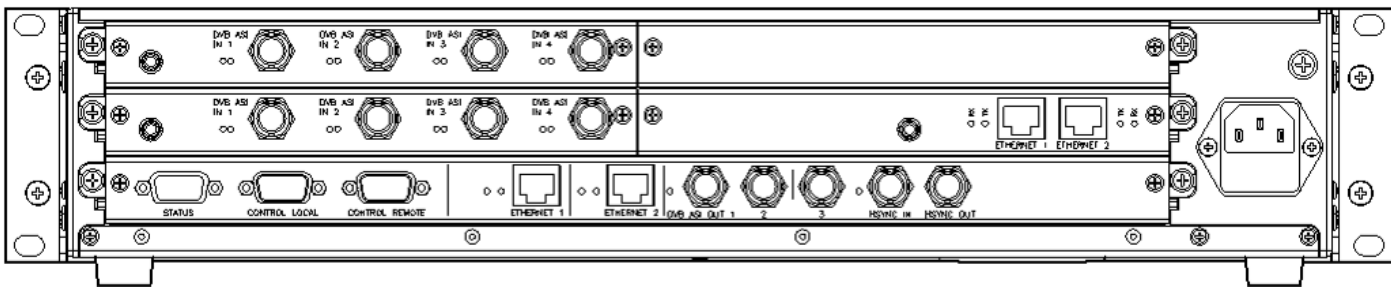

## SPECIFICATIONS

### Inputs

#### MPTS and SPTS Transport Stream Input Options up to 100 Mbps

DVB ASI copper (4 per card)

DVB SPI (ASI loop through 2 per card)

#### Reference Inputs

Internal high specification 27 MHz timing clock reference

External analog video clock reference

GPS Input (10 MHz and 1 Hz from a GPS receiver)

### Outputs

#### Transport Stream Output

1 to 100 Mbps

DVB ASI copper (3 as standard)

DVB ASI optical (2 per option card)

DVB SPI (3 per option card)

SMPTE 310 (2 per option card)

### Multiplexing

Up to 8191 streams

Full PID remapping

Input PID tracking

Internal over bit-rate protection

High output stream utilization

### Control

Control and set-up via TANDBERG nCompass Control

Front panel interface for monitoring and basic set-up

### Physical and Power

#### Dimensions (W x D x H)

MX5620: 440 x 543 x 89mm (17.5" x 21.5" x 2RU)

MX5640: 440 x 543 x 177mm (17.5" x 21.5" x 4RU)

#### Approximate Weight

MX5620: 10Kg (22lb)

MX5640: 20Kg (44lb)

#### Power Input

AC wide ranging 100 -120 VAC or 220 -240 VAC 50 - 60 Hz nominal

-40 VDC to -57 VDC (option)

#### Cooling

Fan assisted, front and side vented

#### Power Consumption

MX5620: 250W nominal

MX5640: 400W nominal

### Environmental Conditions

#### Operating Temperature

0°C to +40°C (32°F to 104°F)

#### Relative Humidity

5 - 90%

**Global Headquarters**  
TANDBERG Television, Inc  
Tel: +1 (678) 812 6300  
Email: americasales@tandbergtv.com

**Asia Pacific Headquarters**  
TANDBERG Television  
Tel: +852 2899 7000  
Email: apacsales@tandbergtv.com

**Australasia**  
TANDBERG Television  
Tel: +61 2 8923 0400  
Email: sales.anz@tandbergtv.com

**EMEA Headquarters**  
TANDBERG Television Ltd  
Tel: +44 (0)23 8048 4000  
Email: salesdesk@tandbergtv.com  
Website: www.tandbergtv.com